



ALL YOU
NEED

orieyamate present

CATALOG LIST

ABOUT SAFETY ON REDWING ...	01
SIZE CHART.....	05
SAFETY SHOES	06
COVERALL	39
BAG	42
ACCESSORIES.....	44



NT

NON METALIC TOE

Jari kaki non-logam mengacu pada tutup jari kaki pelindung pada alas kaki pengaman yang terbuat dari bahan selain logam. Penutup jari kaki ini dirancang untuk memberikan perlindungan yang serupa dengan penutup jari kaki baja tradisional, tetapi terbuat dari bahan komposit seperti plastik, serat karbon, atau Kevlar. Berikut ini beberapa karakteristik utama dari penutup jari kaki non-logam:

Ringan: Penutup jari kaki non-logam umumnya lebih ringan daripada penutup jari kaki baja, sehingga alas kaki lebih nyaman untuk dipakai dalam jangka panjang.

Non-konduktif: Tidak menghantarkan listrik, sehingga cocok untuk lingkungan yang memiliki bahaya listrik.

Isolasi: Penutup jari kaki non-logam menawarkan insulasi yang lebih baik terhadap suhu ekstrem, baik panas maupun dingin.

Ramah Detektor Logam: Penutup jari kaki ini tidak memicu detektor logam, sehingga ideal untuk area yang sensitif terhadap keamanan seperti bandara atau pabrik tertentu.

Kepatuhan: Penutup jari kaki non-logam masih memenuhi standar dan peraturan keselamatan untuk ketahanan benturan dan kompresi, mirip dengan penutup jari kaki baja.

Secara keseluruhan, tutup jari kaki non-logam memberikan alternatif modern untuk sepatu bot ujung baja tradisional, yang menggabungkan keamanan dengan kenyamanan dan kepraktisan tambahan.

ST

STEEL TOE

"Steel toe" adalah istilah yang mengacu pada sepatu atau sepatu bot yang memiliki pelindung dari baja di bagian ujung kaki. Pelindung baja ini dirancang untuk melindungi kaki dari cedera akibat benturan atau tekanan berat. Sepatu dengan ujung baja sering digunakan di lingkungan kerja yang berisiko tinggi, seperti konstruksi, pabrik, dan tempat kerja industri lainnya. Mereka memberikan perlindungan tambahan terhadap benda jatuh, mesin berat, dan potensi bahaya lainnya yang dapat menyebabkan cedera serius pada kaki.

AT

ALUMINIUM TOE

"Aluminium toe" biasanya merujuk pada fitur pada sepatu keselamatan (safety shoes) atau sepatu bot kerja (work boots) yang memiliki pelindung jari kaki yang terbuat dari aluminium. Berikut adalah beberapa karakteristik dan keunggulan dari sepatu dengan aluminium toe:

1. ****Ringan**:** Pelindung jari kaki dari aluminium lebih ringan dibandingkan dengan pelindung jari kaki dari baja, sehingga memberikan kenyamanan lebih saat dipakai dalam waktu lama.

2. ****Kuat dan Tahan Lama**:** Aluminium memiliki kekuatan yang cukup tinggi untuk melindungi jari kaki dari benturan atau tekanan berat, memenuhi standar keselamatan industri.

3. ****Anti-Karat**:** Aluminium tidak mudah berkarat, membuat sepatu dengan aluminium toe lebih tahan lama dalam kondisi lingkungan yang lembap atau basah.

4. ****Isolasi Panas**:** Aluminium memiliki sifat isolasi panas yang baik, sehingga bisa memberikan perlindungan ekstra terhadap panas.

Sepatu dengan aluminium toe biasanya digunakan dalam industri yang memerlukan perlindungan kaki ekstra, seperti konstruksi, manufaktur, dan logistik.

PR

PUNCTURE RESISTANT

"Puncture resistant" adalah istilah yang digunakan untuk menggambarkan bahan atau produk yang dirancang untuk tahan terhadap tusukan atau penetrasi oleh benda tajam. Istilah ini sering digunakan dalam konteks perlengkapan keselamatan, seperti ban kendaraan, sarung tangan kerja, pakaian pelindung, dan pelapis lantai.

Contoh aplikasi dari material yang tahan tusukan meliputi:

1. ****Ban Kendaraan**:** Ban yang tahan tusukan dirancang untuk mengurangi kemungkinan bocor saat terkena benda tajam seperti paku atau pecahan kaca.

2. ****Sarung Tangan Pelindung**:** Sarung tangan ini digunakan dalam industri yang berisiko tinggi terhadap tusukan, seperti konstruksi atau pekerjaan dengan bahan tajam.

3. ****Pakaian Pelindung**:** Pakaian yang tahan tusukan digunakan oleh petugas penegak hukum atau militer untuk melindungi dari serangan benda tajam.

4. ****Material Kemasan**:** Kemasan yang tahan tusukan digunakan untuk melindungi produk yang rentan terhadap kerusakan saat pengiriman.

Material yang digunakan untuk membuat produk tahan tusukan biasanya memiliki sifat kekuatan tinggi dan elastisitas yang baik, seperti kevlar, polietilena, atau bahan komposit khusus.

SR

SLIP RESISTANT

SLIP resistant merujuk pada suatu sifat atau kualitas dari sebuah material atau permukaan yang dirancang untuk mengurangi risiko tergelincir atau terjatuh. Ini biasanya berlaku untuk alas kaki, lantai, dan permukaan lainnya yang seringkali terkena air, minyak, atau bahan lain yang dapat membuatnya licin.

Produk dengan label slip resistant biasanya telah diuji sesuai standar tertentu untuk memastikan bahwa mereka memberikan daya cengkeram yang cukup dan aman saat digunakan dalam kondisi yang berpotensi licin. Sebagai contoh, alas kaki slip resistant sangat penting di tempat kerja seperti restoran, rumah sakit, atau industri lainnya di mana permukaan lantai sering basah atau berminyak.

MT

METATARSAL GUARD

Metatarsal guard adalah pelindung yang dirancang untuk melindungi bagian atas kaki, terutama tulang metatarsal, dari benturan dan tekanan eksternal. Metatarsal guard biasanya terbuat dari bahan seperti baja, aluminium, atau bahan komposit lainnya yang kuat namun ringan. Pelindung ini umumnya digunakan di sepatu keselamatan kerja atau sepatu khusus untuk olahraga tertentu yang melibatkan risiko cedera pada bagian atas kaki.



American Society for Testing and Material

merupakan organisasi internasional sukarela yang mengembangkan standardisasi teknik untuk material, produk, sistem dan jasa. ASTM Internasional yang berpusat di Amerika Serikat

TOE CAP

Toe cap, atau yang sering disebut sebagai tempurung pengaman, adalah bagian krusial dari sepatu safety. Dipasang di bagian ujung sepatu, fungsi utama dari toe cap adalah melindungi jari kaki Anda dari benturan benda berat saat Anda sedang bekerja. Bayangkan jika Anda bekerja di konstruksi atau industri manufaktur, di mana potensi cedera selalu mengintai. Dengan toe cap yang kokoh, Anda dapat bekerja dengan tenang, mengetahui bahwa setiap langkah Anda dilindungi oleh teknologi terkini dan standar keselamatan yang tinggi.

Keberadaan toe cap ini bukan sekadar aksesoris tambahan pada sepatu. Ini adalah parameter utama yang menentukan kualitas sepatu safety itu sendiri. Semakin baik kualitas toe cap pada sepatu safety, semakin tinggi pula tingkat ketahanannya terhadap benturan dari benda berat. Oleh karena itu, pemilihan sepatu dengan toe cap yang berkualitas sangat penting untuk keamanan kaki Anda di lingkungan kerja yang berisiko tinggi.

Sepatu dengan toe cap yang baik bukan hanya memberikan perlindungan maksimal, tetapi juga memberi Anda rasa nyaman saat menjalankan tugas-tugas sehari-hari. Dengan memahami pentingnya toe cap, Anda dapat membuat pilihan yang bijak ketika memilih sepatu safety yang sesuai dengan kebutuhan Anda

- Melindungi Kaki dari Benturan Berat: Fungsi utama toe cap adalah melindungi jari kaki dari benturan benda berat atau tumpul.

Saat bekerja di lingkungan industri atau konstruksi, ada risiko tinggi terkena benda-benda keras atau berat yang bisa menyebabkan cedera pada jari kaki. Toe cap berperan sebagai pelindung yang kuat untuk mencegah cedera serius.

- Mencegah Tekanan: Toe cap juga membantu mencegah jari kaki terperas atau tertekan saat terjadi tekanan di bagian depan sepatu. Dalam situasi di mana ada beban berat atau tekanan eksternal, toe cap membantu menjaga bentuk sepatu dan memberikan ruang yang cukup bagi jari kaki untuk bergerak dengan nyaman.

- Ketahanan terhadap Abrasi dan Aus: Selain melindungi dari benturan, toe cap juga dapat membuat sepatu lebih tahan lama. Bahan toe cap yang kuat dan tahan aus dapat melindungi bagian depan sepatu dari kerusakan akibat gesekan dan abrasi yang terjadi saat bekerja di lingkungan kasar.

- Memberikan Kestabilan: Toe cap juga memberikan kestabilan pada bagian depan sepatu. Dengan adanya toe cap yang kuat, sepatu memiliki struktur yang kokoh, membantu menjaga bentuk sepatu dan memberikan dukungan ekstra pada bagian depan kaki.

- Mengukur Kualitas Sepatu Safety: Kualitas toe cap pada sepatu safety sering kali menjadi indikator kualitas keseluruhan sepatu. Toe cap yang baik menandakan bahwa sepatu tersebut telah dirancang dan diproduksi dengan standar keselamatan yang tinggi.

STEEL TOE

Kelebihan steel toe cap yang paling utama adalah sari segi ketahanan dan harga. Toe cap ini adalah yang termurah dibandingkan composite dan aluminium, namun tidak berarti kualitasnya buruk. Ketahanannya juga yang paling teruji, karena besi lebih kuat dibandingkan dengan composite. Satu hal yang menjadi catatan adalah soal bobot dari toe cap ini yang memang cukup berat. Poin ini bisa menjadi bahan pertimbangan Anda sebelum memilih.

Steel Toe Cap (Baja) adalah jenis pelindung kaki yang terbuat dari baja yang kuat dan tahan terhadap tekanan dan benturan.

Biasanya digunakan dalam sepatu keselamatan kerja untuk memberikan perlindungan maksimal terhadap potensi bahaya seperti benda tumpul atau berat, seperti batu, besi, atau alat berat. Baja yang digunakan dalam toe cap ini mampu menahan beban yang akan merusak atau melukai kaki, menjadikannya pilihan yang sangat baik untuk pekerjaan yang melibatkan risiko fisik serius

COMPOSITE TOE CAP

Composite toe cap terbuat dari material non-metal seperti fiberglass, carbon, atau plastik. Toe cap ini lebih tebal dan besar jika dibandingkan dengan steel toe cap dan biasanya digunakan pada tipe produk safety shoes yang lebih mahal dan berkualitas baik. Composite toe cap adalah pilihan alternatif bagi Anda yang ingin menggunakan sepatu safety namun dengan berat yang cukup ringan. Kelebihannya adalah tidak berat saat dipakai dan lebih nyaman untuk digunakan dalam waktu yang cukup lama. Namun perlu Anda ingat bahwa ketahanannya tidak lebih baik dari steel toe cap. Jadi jika Anda sering berada di area kerja yang penuh dengan alat-alat berat, pertimbangkan baik-baik jika ingin memilih composite toe cap

Composite Toe Cap adalah jenis pelindung kaki yang terbuat dari bahan non-logam, seperti fiberglass atau plastik berkualitas tinggi. Meskipun lebih ringan daripada toe cap baja, komposit ini tetap memberikan perlindungan yang andal terhadap benturan. Biasanya digunakan dalam sepatu keselamatan kerja untuk menjaga kaki dari bahaya benda tumpul, sementara juga memberikan insulasi termal yang baik.

ALUMINIUM TOE CAP

Toe cap dengan bahan aluminium bisa dikatakan menjadi top level toe cap. Selain karena kualitas ketahanannya yang setara dengan steel toe cap, bobotnya pun ringan. Jika dilihat dari sisi kualitas, toe cap ini merupakan pilihan terbaik dan sering dijumpai di sepatu safety dengan harga yang cukup mahal. Memang benar bahwa harganya pun cukup mahal, itu sebabnya poin harga bisa menjadi bahan pertimbangan Anda sebelum memilih sepatu safety dengan aluminium toe cap.

Aluminium Toe Cap adalah varian pelindung kaki yang mirip dengan toe cap baja dalam hal perlindungan terhadap benturan dan tekanan. Namun, yang membedakannya adalah bahan aluminium yang digunakan, yang jauh lebih ringan daripada baja. Hal ini membuatnya menjadi pilihan yang cocok untuk sepatu kerja yang ringan, yang memungkinkan pekerja untuk menjaga kenyamanan dan fleksibilitas sambil tetap mendapatkan perlindungan yang baik terhadap bahaya fisik.

Pilihan toe cap pada sepatu safety yang tepat tergantung pada jenis pekerjaan, risiko, dan preferensi individu. Pemilihan yang benar akan membantu menjaga kaki terlindungi dan nyaman selama penggunaan sepatu.



WATERPROOF



Dari bahan ini sepatu anda akan dilindungi oleh resapan air



ELECTRICAL HAZARD

Electrical hazard adalah kondisi atau situasi yang dapat menyebabkan risiko kecelakaan atau cedera yang berkaitan dengan listrik. Beberapa contoh electrical hazard meliputi:

1. ****Kontak Langsung dengan Kabel atau Peralatan Listrik yang Terbuka****: Kontak dengan kabel atau peralatan yang tidak terlindungi dapat menyebabkan kejutan listrik yang serius atau bahkan fatal.
2. ****Peralatan Listrik yang Rusak atau Usang****: Peralatan yang tidak dalam kondisi baik atau sudah usang dapat menyebabkan arus pendek atau kebakaran listrik.
3. ****Kelembaban atau Air di Dekat Peralatan Listrik****: Air adalah konduktor listrik yang baik. Kehadiran air atau kelembaban dapat meningkatkan risiko kejutan listrik.
4. ****Overloading atau Penggunaan Berlebihan dari Sumber Daya Listrik****: Menggunakan terlalu banyak peralatan pada satu sirkuit dapat menyebabkan pemanasan berlebih dan risiko kebakaran.
5. ****Pengkabelan yang Tidak Sesuai atau Tidak Aman****: Instalasi listrik yang tidak sesuai dengan standar atau tidak aman dapat menyebabkan berbagai masalah, termasuk kejutan listrik dan kebakaran.
6. ****Kurangnya Pelatihan dan Pengetahuan****: Pengguna atau pekerja yang tidak memiliki pengetahuan yang cukup tentang keamanan listrik cenderung lebih rentan terhadap kecelakaan.

Untuk mengurangi risiko electrical hazard, penting untuk mematuhi standar keamanan listrik, menggunakan peralatan listrik dengan benar, dan memastikan semua instalasi listrik dilakukan oleh profesional yang berlisensi.



CSA / CANADIAN STANDART

"Canadian Standard" atau "Standar Kanada" merujuk pada berbagai standar yang digunakan di Kanada untuk memastikan kualitas, keselamatan, dan konsistensi dalam berbagai industri dan sektor. Beberapa organisasi utama yang mengembangkan dan memelihara standar di Kanada meliputi:

1. ****Canadian Standards Association (CSA)****: Organisasi ini mengembangkan standar nasional untuk berbagai industri, termasuk kesehatan dan keselamatan, teknologi, lingkungan, dan lainnya.
2. ****Standards Council of Canada (SCC)****: Badan ini mengakreditasi organisasi yang mengembangkan standar, serta laboratorium yang melakukan pengujian dan kalibrasi.
3. ****Canadian General Standards Board (CGSB)****: Menyediakan layanan pengembangan standar dan sertifikasi untuk pemerintah dan industri. Standar-standar ini mencakup berbagai aspek, seperti spesifikasi produk, metode pengujian, praktik kerja, dan persyaratan keselamatan. Tujuan utamanya adalah untuk melindungi konsumen, meningkatkan kualitas produk dan layanan, serta mendukung perdagangan dan inovasi.



INSULATION TYPE

"Insulation type" mengacu pada jenis bahan atau metode yang digunakan untuk mengisolasi sesuatu, biasanya untuk mengontrol suhu, suara, atau listrik. Dalam berbagai konteks, istilah ini dapat berarti berbeda-beda:

1. ****Insulasi Termal****: Digunakan untuk mengurangi transfer panas antara dua daerah dengan suhu yang berbeda. Contohnya termasuk wol kaca, busa polistirena, dan fiberglass.
2. ****Insulasi Akustik****: Digunakan untuk mengurangi transfer suara antara dua area. Contohnya termasuk panel akustik, busa akustik, dan karpet tebal.
3. ****Insulasi Listrik****: Digunakan untuk mengisolasi bagian-bagian listrik untuk mencegah arus listrik mengalir ke tempat yang tidak diinginkan. Contohnya termasuk karet, plastik, dan kaca.

Memilih jenis insulasi yang tepat bergantung pada kebutuhan spesifik aplikasi dan kondisi lingkungan di mana insulasi tersebut akan digunakan.



BOA FIT SYSTEM

BOA® FIT SYSTEM

Putar tombol untuk mendapatkan kesesuaian yang cepat, mudah, dan presisi dengan BOA® Fit System, yang dibuat untuk performa sepanjang hari di lingkungan apa pun. Tekan untuk mengaktifkan sistem, putar tombol untuk menyesuaikan secara mikro ke penyesuaian khusus dan presisi, dan tarik ke atas untuk melepaskan dengan cepat



HRO / HIGH RESISTANT OVER

Sol yang telah dirancang dan diuji untuk bekerja pada permukaan dengan suhu tinggi. Sol yang diidentifikasi sebagai HRO tahan panas hingga meleleh pada suhu minimum 475° Fahrenheit.



REDWING LEATHER

Dimulai dengan kulit dari sapi yang dibesarkan di AS dengan ketidaksempurnaan permukaan yang minimal, kami mengontrol setiap langkah prosesnya, menggunakan teknik yang telah teruji selama bertahun-tahun untuk menghasilkan kulit dengan keindahan alami dan daya tahan yang tak tertandingi.



VIBRAM OUTSOLE

Desain yang luar biasa berpadu dengan senyawa karet yang inovatif untuk menciptakan sol luar yang serbaguna dan berkinerja tinggi. Sol luar Vibram® menawarkan traksi yang sangat baik dan ketahanan abrasi yang tinggi di berbagai lingkungan.



3M™ THINSULATE™ ULTRA

Insulasi terbaik untuk sepatu bot cuaca dingin, 3M™ Thinsulate™ Ultra Insulation tipis, hangat, dan ringan, dengan daya tahan untuk menahan pemakaian keras selama berjam-jam dan menjaga kaki tetap hangat bahkan dalam kondisi lembap.

KING TOE™ KING TOE

Kotak jari kaki yang lebih besar memberikan kenyamanan dan ruang jari kaki 44% lebih besar daripada sepatu bot standar kami.



WOMENS FIT

Gaya wanita kami dibuat khusus untuknya, menciptakan kesesuaian yang luar biasa tanpa mengorbankan performa atau daya tahan.



CROSSBREEZE

Teknologi CrossBreeze memindahkan panas dari kulit di atas, di sekitar, dan di bawah kaki, menciptakan efek pendinginan instan.



FORCE GUARD

Teknologi ini merupakan lapisan pelindung yang memberikan ketahanan terhadap abrasi, minyak, dan bahan kimia dalam jangka waktu lama pada area kritis sepatu bot.



FLAME RESISTANT

Flame Resistant (FR) merujuk pada sifat atau kemampuan suatu bahan atau pakaian untuk tidak mudah terbakar atau menghentikan penyebaran api. Materi yang tahan api memiliki sifat-sifat tertentu yang mengurangi risiko terbakarnya atau meluasnya api saat terpapar panas atau api



ANTI - STATIC

tidak bersifat menarik debu debu halus seperti pada umumnya bahan plastik.



WINDPROOF

memiliki kemampuan yang baik untuk menahan angin.

SIZE CHART

UK	US (MEN)	EUR	CM	US (WOMEN)
2.5	3.5	35	21.5 cm	5
3	4	35	22 cm	5.5
3.5	4.5	36	22.5 cm	6
4	5	37	23	6.5
4.5	5.5	37.5	23.5	7
5	6	38	24	7.5
5.5	6.5	38.5	24.5	8
6	7	39	25	8.5
6.5	7.5	40	25.5	9
7	8	41	26	9.5
7.5	8.5	41.5	26.5	10
8	9	42	27	10.5
8.5	9.5	42.5	27.5	11
9	10	43	28	12
9.5	10.5	43.5	28.5	
10	11	44	29	
10.5	11.5	45	29.5	
11	12	46	30	
12	13	47	31	
13	14	48	32	
14	15	49	33	
15	16	50	34	

Glosarium Lebar Brannock

Beberapa huruf pada perangkat Brannock yang mungkin ingin Anda ketahui akan tercantum di bawah ini. Mereka akan memberi tahu Anda apakah Anda memiliki kaki yang sempit, tipikal, lebar, atau ekstra lebar.

- C – Huruf ini menandakan bahwa Anda memiliki kaki yang sempit
- D – Huruf ini menunjukkan bahwa kaki Anda memiliki lebar rata-rata
- E – Huruf ini menandakan bahwa kaki Anda lebih lebar dari rata-rata
- EE – huruf ini menandakan kaki Anda ekstra lebar
- EEE – huruf ini menandakan kaki Anda sangat ekstra lebar

SAFETY SHOES

REDWING 2235

WORK – KING TOE

Men's 6-Inch Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Oiled And Waxed
Height	: 6-Inch
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-Metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: No
Sourcing	: Globally Sourced



KING TOE®

D EE H

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2240

WORK – KING TOE

Men's 6-Inch Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof And Waxed
Height	: 6-Inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-Metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Weight	: 3 Lbs. 7 Oz.
Resoleable	: No
Sourcing	: Globally Sourced



KING TOE®

D EE H

R | W
LEATHER

7 7.5 8 8.5 9 9.5 10.5 11 11.5 12 13 14

06

SAFETY SHOES

REDWING 2241

WORK – KING TOE

Men's 6-Inch Safety Toe Boot

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof And Waxed
Height	: 6-Inch
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane SD
Insole	: Nature Tex®
Shank	: Non-Metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: No
Sourcing	: Globally Sourced



D EE

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

REDWING 2242

WORK – KING TOE

Women's 6-Inch Safety Toe Boot

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof And Waxed
Height	: 6-Inch
Insulation	: CosmoComfort
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Removable Polyurethane
Insole	: Texon®
Shank	: TPU
Last	: JV2-0006
Outsole	: TPU-PU Galaxy - Brown
Weight	: 3 Lbs. 4 Oz.
Resoleable	: No
Sourcing	: Globally Sourced



WOMENS
←FIT→ COSMOCOMFORT

D EE

5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5

07

SAFETY SHOES

REDWING 2243



D EE H

WORK – KING TOE

Men's 6-Inch Safety Toe Boot

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Weight	: 3 lbs. 7 oz.
Resoleable	: no
Sourcing	: Globally Sourced



7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2244



D EE H

WORK – KING TOE

Men's 6-Inch Safety Toe Boot

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 8-inch
Insulation	: 400g 3M™ Thinsulate™ Ultra
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: no
Sourcing	: Globally Sourced



7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

08

SAFETY SHOES

REDWING 2247

WORK – KING TOE

Women's 6-Inch Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: JV2-0006
Outsole	: TPU-PU Galaxy - Brown
Weight	: 3 lbs. 3 oz.
Resoleable	: no
Sourcing	: Globally Sourced



WOMENS
←FIT→

KING TOE®

D EE H

5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

REDWING 2260

WORK – KING TOE

Men's 6-Inch Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 6-inch
Insulation	: 400g 3M™ Thinsulate™ Ultra
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: no
Sourcing	: Globally Sourced



3M
Thinsulate™ Ultra
INSULATION

KING TOE®

R | W
LEATHER

D EE H

5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

09

SAFETY SHOES

REDWING 2280

WORK – KING TOE

Men's 6-Inch Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 8-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: no
Sourcing	: Globally Sourced



R | W
LEATHER

KING TOE®

D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2281

WORK – ECOLITE

Men's Safety Toe Oxford



Safety Toe	: Aluminum Toe
Height	: Oxford
Construction	: Cement
Footbed	: Removable EVA
Insole	: Non-woven
Shank	: None
Last	: 305
Outsole	: ReSurge - Black-TanFleck
Weight	: 2 lbs.
Resoleable	: no
Sourcing	: Globally Sourced



D EE H

6 7 7.5 8 8.5 9 9.5 10 10.5 11 12 13 14

10

SAFETY SHOES

REDWING 2282

WORK – ECOLITE

Men's Safety Toe Oxford



Safety Toe	: Aluminum Toe
Height	: Oxford
Construction	: Cement
Footbed	: Removable EVA
Insole	: Non-Woven
Shank	: Non
Last	: 305
Outsole	: RuSurge – Black - TanFleck
Weight	: 1 Lb
Resoleable	: no
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2283

WORK – ECOLITE

Men's 4-Inch Safety Toe Hiker Boot



Safety Toe	: Aluminum Toe
Height	: Hiker
Construction	: Cement
Footbed	: Removable EVA
Insole	: Non-woven
Shank	: None
Last	: 305
Outsole	: ReSurge - Black-TanFleck
Weight	: 2 Lbs.
Resoleable	: no
Sourcing	: Globally Sourced



D EE H

6 7 7.5 8 8.5 9 9.5 10 10.5 11 12 13 14

11

SAFETY SHOES

REDWING 2298

WORK – KING TOE

Men's 6-Inch Safety Toe



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Weight	: 3 lbs. 6 oz.
Resoleable	: no
Sourcing	: Globally Sourced



KING TOE

R | W
LEATHER

D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2320

WORK – COOLTECH™ ATHLETICS

Women's 6-Inch Safety Toe Shoe



Safety Toe	: Non-Metallic Toe
Height	: Oxford
Construction	: Cement
Footbed	: Fabric Covered EVA
Insole	: Non-woven
Last	: 307
Outsole	: Vibram® SpeedSole - Black-Teal
Weight	: 1 lb. 13 oz.
Resoleable	: no
Sourcing	: Globally Sourced



WOMENS
-FIT-



D

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

12

SAFETY SHOES

REDWING 2340

WORK – KING TOE Men's 6-Inch Safety Toe



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 5-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: No
Sourcing	: Globally Sourced



R | W
LEATHER

KING TOE®

D EE

5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

REDWING 2343

WORK – COOLTECH™ ATHLETICS Women's 6-Inch Safety Toe



Safety Toe	: Non-Metallic Toe
Height	: Oxford
Construction	: Cement
Footbed	: Fabric Covered EVA
Insole	: Non-woven
Last	: 307
Outsole	: Vibram® SpeedSole - Gray-Purple
Weight	: 1 lb. 14 oz.
Resoleable	: no
Sourcing	: Globally Sourced



WOMENS
←FIT→



D

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

13

SAFETY SHOES

REDWING 2344

WORK – STYLE TRADESWOMAN WOMEN'S 6-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Removable Polyurethane
Insole	: Non-woven
Shank	: Nylon
Last	: 601-W
Outsole	: VersaTrax - Black-Burgundy
Weight	: 3 lbs.
Resoleable	: no
Sourcing	: Globally Sourced



WOMENS
←FIT→



D

- 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 -

REDWING 2345

WORK – STYLE TRADESWOMAN WOMEN'S 6-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Removable Polyurethane
Insole	: Non-woven
Shank	: Nylon
Last	: 601-W
Outsole	: VersaTrax - Black-Gray
Weight	: 3 lbs.
Resoleable	: no
Sourcing	: Globally Sourced



WOMENS
←FIT→

D

- 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 -

14

SAFETY SHOES

REDWING 2346

WORK – STYLE TRADESWOMAN WOMEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Removable Polyurethane
Insole	: Non-woven
Shank	: Nylon
Last	: 601-W
Outsole	: VersaTrax - Black-Turquoise
Weight	: 3 lbs.
Resoleable	: no
Sourcing	: Globally Sourced



WOMENS
←FIT→

D EE H

- 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 -

REDWING 2347

WORK – KINGTOE

WOMEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane
Insole	: Texon®
Shank	: Non-metallic
Last	: JV2-0006
Outsole	: TPU-PU Galaxy - Brown
Weight	: 3 lbs. 3 oz.
Resoleable	: no
Sourcing	: Globally Sourced



KING TOE®



WOMENS
←FIT→

D EE H

5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

15

SAFETY SHOES

REDWING 2400



WORK – BRNR XP

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach to Welt
Footbed	: Quadrex V2 Multi-Layer System
Insole	: Texon®
Shank	: Fiberglass
Last	: 687
Outsole	: Dual Density GripTek - Black-Gray
Resoleable	: Yes
Sourcing	: Assembled in the USA with Imported Components



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2403



WORK – BRNR XP

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach to Welt
Footbed	: Quadrex V2 Multi-Layer System
Insole	: Texon®
Shank	: Fiberglass
Last	: 687
Outsole	: Dual Density GripTek - Black-Gray
Resoleable	: Yes
Sourcing	: Assembled in the USA with Imported Components



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

16

SAFETY SHOES

REDWING 2410



WORK – BURNSIDE

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach to Welt
Footbed	: Quadrex V2 Multi-Layer System
Insole	: Texon®
Shank	: Fiberglass
Last	: 687
Outsole	: Vibram® UltraSole
Resoleable	: Yes
Sourcing	: Made in the USA with Imported Parts



D EE H

6 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2411



WORK – BRNR XP

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Direct Attach to Welt
Footbed	: Quadrex V2 Multi-Layer System
Insole	: Texon®
Shank	: Fiberglass
Last	: 687
Outsole	: Vibram® UltraSole
Resoleable	: Yes
Sourcing	: Made in the USA with Imported Parts



D EE H

6 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

17

SAFETY SHOES

REDWING 2415



WORK – TRACTION TRED

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof and Oiled
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Goodyear Leather Welt
Footbed	: Removable Polyurethane
Insole	: Bontex®
Last	: 325
Outsole	: Rubber-Blown Rubber Traction Tred
Weight	: 3 lbs. 11 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



R | W
LEATHER

D EE

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2418



WORK – TRACTION TRED

MEN'S 8-INCH WATERPROOF SAFETY TOE BOOT

Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof and Oiled
Height	: 8-inch
Waterproof	: Red Wing Waterproofing
Construction	: Goodyear Leather Welt
Footbed	: Nylon Covered Polyurethane
Insole	: Bontex®
Last	: 325
Outsole	: Rubber-Blown Rubber Traction Tred
Weight	: 4 lbs. 1 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



R | W
LEATHER

D EE

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

18

SAFETY SHOES

REDWING 2440

WORK – TRACTION TRED

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Removable Polyurethane
Insole	: Bontex®
Last	: 325
Outsole	: LiteTred - Tan
Resoleable	: Yes
Sourcing	: Globally Sourced



R | W
LEATHER

D EE

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2441

WORK – KINGTOE

MEN'S 6-INCH SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Waxed
Height	: 6-inch
Construction	: Direct Attach
Footbed	: Nylon Covered Polyurethane SD
Insole	: Nature Tex®
Shank	: Non-metallic
Last	: 800
Outsole	: TPU-PU Galaxy - Brown
Resoleable	: No
Sourcing	: Globally Sourced



KING TOE

D EE

6 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

19

SAFETY SHOES

REDWING 2442

WORK – TRACTION TRED

MEN'S 8-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 8-inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Removable Polyurethane
Insole	: Bontex®
Last	: 325
Outsole	: LiteTred - Tan
Weight	: 3 lbs. 12 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



R | W
LEATHER

D EE

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2443

WORK – TRACTION TRED LITE

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Removable Polyurethane
Insole	: Bontex®
Last	: 325
Outsole	: LiteTred - Tan
Weight	: 3 lbs. 7 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



R | W
LEATHER

D EE

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

SAFETY SHOES

REDWING 2444

WORK – TRACTION TRED LITE

WOMEN'S 6-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof and Oiled
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Removable Polyurethane
Insole	: Bontex®
Last	: 325 :
Outsole	: LiteTred - Crepe
Weight	: 3 lbs. 2 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced

WOMENS
←FIT→



D

5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11

REDWING 2447

WORK – TRACTION TRED LITE

MEN'S 6-INCH WATERPROOF SAFETY TOE BOOT



Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Polyurethane
Insole	: Bontex®
Last	: 325 :
Outsole	: LiteTred - Crepe
Weight	: 3 lbs. 9 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

21

SAFETY SHOES

REDWING 2448

WORK – TRACTION TRED Men's Csa Safety Toe Chelsea



Safety Toe	: Non-Metallic Toe
Leather Type	: Full Grain, Waterproof and Oiled CSA Standard CSA Grade 1, ESR Rated, PR
Height	: 5-inch
Construction	: Welt
Footbed	: Removable Polyurethane
Insole	: Swen-Flex®
Shank	: None
Last	: C325
Outsole	: LiteTred - Black
Weight	: 3 lbs. 9 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2449

WORK – TRACTION TRED LITE Men's 5-Inch Safety To Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled and Waxed
Height	: 6-inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Removable Polyurethane
Insole	: Bontex®
Shank	: Steel
Last	: 325
Outsole	: LiteTred DH - Tan
Weight	: 3 lbs. 9 oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

22

SAFETY SHOES

REDWING 2461

WORK – TRACTION TRED LITE Men's Waterproof Safety Toe Chukka



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Waxed
Height	: 5 - inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Polyurethane
Insole	: Bontex
Shank	: None
Last	: 325
Outsole	: LiteTred - Tan
Weight	: 3 lbs. 2 Oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2462

WORK – TRACTION TRED LITE Men's 6-Inch Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Waxed
Height	: 6 - inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Polyurethane
Insole	: Bontex
Shank	: None
Last	: 325
Outsole	: LiteTred - Tan
Weight	: 3 lbs. 9 Oz.
Resoleable	: Yes
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

23

SAFETY SHOES

REDWING 2551

WORK – TRUGUARD LITE

Men's 6-Inch Waterproof Safety Toe



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled & Waxed
Height	: 6 - inch
Waterproof	: Red Wing Waterproofing
Construction	: Welt
Footbed	: Bio-Based Carbon Polyurethane
Insole	: Texon
Shank	: Nylon
Last	: 601
Outsole	: HDL Pivotal – Black
Weight	: 3 lbs. 13 Oz.
Resoleable	: Yes
Sourcing	: Globally Sourced

HR



D EE H

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 2305

WORK – PETROKING

Men's Petroking 6-Inch Boot



Name	: PetroKing
Leather Type	: PU Coated
Construction	: Direct Attach
Insole	: Swen-Flex® Pro Black
Shank	: Nylon
Last	: RW51423
Outsole	: TredMax
Non-Marking	: Yes
Sourcing	: Made in Italy



35 36 37 38 39 40 41 42 43 44 45 46 47 48

24

SAFETY SHOES

REDWING 3207

WORK – PETROKING
Men's 8-Inch Petroking Boot



Name : PetroKing
Leather Type : PU Coated
Construction : Direct Attach
Insole : Swen-Flex® Pro Black
Shank : Nylon
Last : RW51423
Outsole : TredMax
Non-Marking : Yes
Sourcing : Made in Italy



35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 2308

WORK – PETROKING
Men's Petroking 8-Inch Boot



Name : PetroKing
Leather Type : PU Coated
Construction : Direct Attach
Insole : Lenzi Q FLEX TX T6 MXC
Puncture Resistant
Last : RW51423
Outsole : TredMax
Waterproof : Waterproof Membrane
Non-Marking : Yes
Sourcing : Made in Italy



35 36 37 38 39 40 41 42 43 44 45 46 47 48

25

SAFETY SHOES

REDWING 3228

WORK – PETROKING
Men's 6-Inch Petroking Boot



Name : PetroKing
Leather Type : Nubuck, Waterproof & Waxed
Construction : Direct Attach
Insole : Swen-Flex®
Shank : Nylon
Last : RW51423
Outsole : TredMax
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Waterproof Cleaner, Leather Protector, Mink Oil

PR

NT

EH

SR

35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 3229

WORK – PETROKING
Men's Petroking 8-Inch Boot



Name : PetroKing
Leather Type : Nubuck, Waterproof & Waxed
Construction : Direct Attach
Insole : Swen-Flex®
Shank : Nylon
Last : RW51423
Outsole : TredMax
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Waterproof Cleaner, Leather Protector, Mink Oil

PR

NT

EH

SR

35 36 37 38 39 40 41 42 43 44 45 46 47 48

26

SAFETY SHOES

REDWING 3233

WORK – PETROKING Men's 6-Inch Petroking Boot



Name : PetroKing
Leather Type : Nubuck, Waterproof & Waxed
Construction : Direct Attach
Insole : Swen-Flex® Pro Black
Shank : Nylon
Last : RW51423
Outsole : TredMax
Non-Marking : Yes
Defined Heel : Yes
Sourcing : Made in Italy
Care Products : Waterproof Cleaner, Leather Protector, Mink Oil

PR

NT

SD

SR

AN

35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 3251

WORK – COMFORTMAX Men's ComfortMax OTF Oxford



Name : ComfortMax OTF
Leather Type : Full Grain
Construction : Direct Attach
Insole : Lenzi Q FLEX TX T6 Puncture Resistant
Last : A1041
Outsole : ReboundFlex
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Foam Cleaner, Leather Protector, Leather Cream

PR

NT

EH

SR

35 36 37 38 39 40 41 42 43 44 45 46 47 48

27

SAFETY SHOES

REDWING 3252

WORK – COMFORTMAX

Men's ComfortMax OTF Oxford



Name : ComfortMax OTF
Leather Type : Full Grain, Waterproof
Construction : Direct Attach
Insole : Lenzi Q FLEX TX T6 Puncture Resistant
Last : A1041
Outsole : ReboundFlex
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Foam Cleaner, Leather Protector, Leather Cream

PR

NT

EH

SR

35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 3253

WORK – COMFORTMAX

Men's ComfortMax OTF Oxford



Name : ComfortMax OTF
Leather Type : Full Grain
Construction : Direct Attach
Insole : Lenzi Q FLEX TX T6 Puncture Resistant
Last : A1041
Outsole : ReboundFlex
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Foam Cleaner, Leather Protector, Leather Cream

PR

NT

EH

SR

35 36 37 38 39 40 41 42 43 44 45 46 47 48

28

SAFETY SHOES

REDWING 3254

WORK – COMFORTMAX
Men's ComfortMax OTF Oxford



Name : ComfortMax OTF
Leather Type : Full Grain, Waterproof
Construction : Direct Attach
Insole : Lenzi Q FLEX TX T6 Puncture Resistant
Last : A1041
Outsole : ReboundFlex
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Foam Cleaner, Leather Protector, Leather Cream



35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 3256

WORK – COMFORTMAX
Men's ComfortMax OTF Oxford



Name : ComfortMax OTF
Leather Type : Full Grain, Waterproof
Construction : Direct Attach
Insole : Lenzi Q FLEX TX T6 Puncture Resistant
Last : A1041
Outsole : ReboundFlex
Non-Marking : Yes
Sourcing : Made in Italy
Care Products : Foam Cleaner, Leather Protector, Leather Cream



35 36 37 38 39 40 41 42 43 44 45 46 47 48

29

SAFETY SHOES

REDWING 3295

WORK – SHIELDLITE ATHLETICS Men's Athletic BOA® Safety Toe



Safety Toe	: Non-Metallic Toe
Construction	: Direct Attach
Insole	: Lenzi Q FLEX TX T6 MXC Puncture Resistant
Outsole	: ReboundFlex
Last	: A1041
Defined	: No
Outsole	: ReboundFlex - Orange
Weight	: 2 Lbs. 15 Oz.
Sourcing	: Globally Sourced



L-protection®
LENZI



35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 3296

WORK – SHIELDLITE ATHLETICS Men's Athletic BOA® Safety Toe Hiker



Safety Toe	: Non-Metallic Toe
Construction	: Direct Attach
Insole	: Lenzi Q FLEX TX T6 MXC Puncture Resistant
Last	: A1041
Non-Marking	: Yes
Defined	: No
Outsole	: ReboundFlex - Orange
Weight	: 2 Lbs. 15 Oz.
Sourcing	: Globally Sourced



L-protection®
LENZI



35 36 37 38 39 40 41 42 43 44 45 46 47 48

30

SAFETY SHOES

REDWING 3298

WORK – SHIELDLITE ATHLETICS Men's Athletic BOA® Safety Toe Hiker



Safety Toe	: Non-Metallic Toe
Height	: Hiker
Construction	: Direct Attach
Footbed	: Removable Polyurethane
Insole	: Lenzi Q FLEX TX T6 MXC Puncture Resistant
Last	: A1041
Outsole	: ReboundFlex - Blue
Weight	: 2 Lbs. 15 Oz.
Resoleable	: No
Sourcing	: Globally Sourced



35 36 37 38 39 40 41 42 43 44 45 46 47 48

REDWING 4200

WORK – DYNAFORCE BOOT Men's Dynaforce® 8-Inch Boot



Safety Toe	: Steel Toe
Leather Type	: Nubuck, Waterproof, Oiled & Waxed
Waterproof	: Redwing Waterproofing
Height	: 8-Inch
Construction	: SuperSole* Welt
Footbed	: ComfortForce*
Insole	: DynaForce*
Shank	: Non-Metallic
Last	: 694
Outsole	: Horizon DL SuperSole
Resoleable	: Yes
Sourcing	: Globally Sourced



D EE H B

35 36 37 38 39 40 41 42 43 44 45 46 47 48

31

SAFETY SHOES

REDWING 4215

WORK – DYNAFORCE BOOT Men's Dynaforce® 6-Inch Boot



Safety Toe	: Steel Toe
Leather Type	: Nubuck, Waterproof, Oiled & Waxed
Waterproof	: Redwing Waterproofing
Height	: 8-Inch
Construction	: SuperSole® Welt
Footbed	: ComfortForce®
Insole	: DynaForce®
Shank	: Non-Metallic
Last	: 694
Outsole	: Horizon DL SuperSole
Resoleable	: Yes
Sourcing	: Assembled in the USA with Imported Components



D EE H B

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 4216

WORK – FLEXBOND Men's 6-Inch BOA® Safety Toe Boot



Safety Toe	: Non-Metallic Toe
Leather Type	: Nubuck, Waterproof, Oiled & Waxed
Waterproof	: Redwing Waterproofing
Height	: 6-Inch
Construction	: Direct Attach
Footbed	: Cambrelle® Covered Polyurethane
Insole	: Bontex®
Shank	: Non-Metallic
Last	: CH-691
Outsole	: Rubber-PU Auger – Black
Resoleable	: No
Sourcing	: Globally Sourced



7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

32

SAFETY SHOES

REDWING 6338

WORK – ATHLETICS

MEN'S SAFETY TOE ATHLETIC WORK SHOE



Safety Toe	: Alumnium Toe
Height	: Oxford
Construction	: Construction
Footbed	: Nylon Covered Open Cell Foam
Insole	: Non-woven
Shank	: Nylon
Last	: 305
Outsole	: Rubber-EVA Stealth
Resoleable	: no
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 6343

WORK – COOLTECH™ ATHLETICS

MEN'S SAFETY TOE ATHLETIC WORK SHOE



Safety Toe	: Non-Metalic Toe
Height	: Oxford
Construction	: Cement
Footbed	: Fabric Covered EVA
Insole	: Non-woven
Last	: 305
Outsole	: Vibram® SpeedSole - Charcoal-Red
Weight	: 2 lbs. 2 oz.
Resoleable	: No
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

33

SAFETY SHOES

REDWING 6344

WORK – COOLTECH™ ATHLETICS
MEN'S SAFETY TOE ATHLETIC WORK
SHOE



Safety Toe	: Non-Metallic Toe
Height	: Oxford
Construction	: Cement
Footbed	: Fabric Covered EVA
Insole	: Non-woven
Last	: 305
Outsole	: Vibram® SpeedSole - Black-Charcoal
Weight	: 2 lbs. 1 oz.
Resoleable	: no
Sourcing	: Globally Sourced



D EE H

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 6692

WORK – TRUHIKER
MEN'S 5-INCH SAFETY TOE HIKER
BOOT



Safety Toe	: Aluminum Toe
Leather Type	: Full Grain, Waterproof
Height	: 5-inch
Construction	: Cement
Footbed	: Removable Polyurethane
Insole	: Non-woven
Shank	: Nylon
Last	: 228
Outsole	: Rubber Ranger
Resoleable	: no
Sourcing	: Globally Sourced



D EE

8 8.5 9 9.5 10 10.5 11 11.5 12 13

34

SAFETY SHOES

REDWING 6719

WORK – CROSS LITE MEN'S SAFETY TOE CHUKKA



- Safety Toe : Aluminum Toe
- Leather Type : Full Grain
- Height : Chukka
- Construction : Cement
- Footbed : Fabric Covered EVA
- Insole : Non-woven SD
- Last : 312
- Outsole : X-Lite - White
- Weight : 14 oz.
- Resoleable : no
- Sourcing : Globally Sourced



D EE H

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

REDWING 6720

WORK – CROSS LITE MEN'S SAFETY TOE CHUKKA



- Safety Toe : Aluminum Toe
- Leather Type : Full Grain
- Height : Chukka
- Construction : Cement
- Footbed : Fabric Covered EVA
- Insole : Non-woven SD
- Last : 312
- Outsole : X-Lite - White
- Weight : 14 oz.
- Resoleable : no
- Sourcing : Globally Sourced



D EE H

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

SAFETY SHOES

REDWING 8111

WORK – IRON RANGER
MEN'S 6-INCH BOOT IN AMBER
HARNESS LEATHER



Leather Type : Full Grain, Oiled
Construction : Goodyear Leather Welt
Last : 8
Shank : Steel
Hardware : Nickel Eyelets and Hooks
Outsole : Vibram® 430 Mini-lug
Resoleable : Yes

D EE

4.5 5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

REDWING 8231

WORK – MEN'S HIGH CUT
Men's 11-Inch Pull On Boot



Leather Type : Full grain, Water - Resistant
Leather Name : Brown Boomer Leather
Construction : SuperSole® Welt
Footbed : Fabric Covered EVA
Insole : Swen-Flex®
Last : 522
Shank : Steel
Outsole : Mini Lug SuperSole® – Black



SWEN-FLEX® **R | W**
LEATHER

E EE EEE

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14

36

SAFETY SHOES

REDWING 8241

WORK – MEN'S HIGH CUT
MEN'S PECOS 9-INCH PULL-ON BOOT



Leather Type : Full Grain, Water-Resistant
Leather Name : Brown Boomer Leather
Construction : SuperSole® Welt
Insole : PORON®
Shank : Fiberglass
Last : 522
Outsole : Mini Lug SuperSole® – Black

R | W
LEATHER

EH

PR

E EE EEE

5 5.5 6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13

REDWING 8249

WORK – MEN'S MID CUT
MEN'S 6-INCH BOOT



Leather Type : Full Grain, Oiled
Construction : SuperSole® Welt
Insole : PORON®
Shank : Fiberglass
Outsole : Mini Lug SuperSole® – Black

ST

EH

E EE EEE

7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13

37

SAFETY SHOES

REDWING 10875

WORK – TRACTION TRED
MEN'S 6-INCH SOFT TOE BOOT



- Leather Type : Full Grain, Oiled
- Construction : Goodyear Leather Welt
- Height : 6-inch
- Insole : Leather
- Last : 23
- Outsole : Traction Tred Cushion Crepe Wedge
- Resoleable : Yes
- Sourcing : Made in USA



R | W
LEATHER



B D E EE

6 6.5 7 7.5 8 8.5 9 9.5 10 10.5 11 11.5 12 13 14 15

COVERALL

REDWING 61111

MEN'S PREMIUM COVERALL

FEATURES :

- Two chest pockets with concealed zip closure
- Two side pockets with hidden exterior-to-interior access and press stud closure
- Two back pockets, right side with flap
- Tool pocket on right leg
- Elasticized waistband
- 2" (50mm) wide reflective FR striping around arms, legs and over the shoulders
- Two radio loops
- Concealed two-way, black high-density polyester coil zip with press stud closure
- Concealed press studs on cuffs and ankle openings
- Left sleeve pocket with pen pocket divider, small flap with hook-and-loop closure
- Shoulder pleats for freedom of movement and comfort




FLAME RESISTANT



ANTI-STATIC



CATEGORY 2

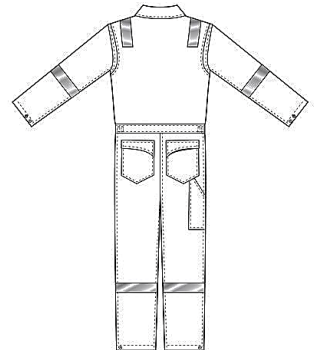

Material

Red Wing FlashGuard® TM, (Quality 11), FR 48% Tencel/39% Modacrylic/12% Aramid/1% Carbon, 6.5 oz/yd²/220 g/m²

Sizes

32-70, Short/Reg/Tall/XTall

Compliance

EN ISO 11612, EN 1149-5, NFPA 2112 UL recognized component -fabric, IEC 61482-2 (Class 1)

Technologies

Flame Resistant Garment, Anti-Static Garment, Electric Arc Flash Protection, CAT2

Colors

Tan[51], Petro Blue[52]*, Navy Blue[53], Royal Blue[54], Red[55], Graphite Gray[56], Orange[57], Yellow[59]*, Light Gray[76]

MEN'S COVERALLS

INSULATED

CHEST	INCH/CM EQUIVALENT	
XS	34"-36"	86-92 cm
S	36"-38"	92-97 cm
M	38"-42"	97-107 cm
L	42"-46"	107-117 cm
XL	46"-50"	117-127 cm
2XL	50"-54"	127-137 cm
3XL	54"-58"	137-147 cm
4XL	58"-62"	147-157 cm
5XL	62"-66"	157-168 cm
6XL	66"-70"	168-178 cm
HEIGHT	INCH/CM EQUIVALENT	
Short	up to 5' 9"	up to 175 cm
Regular	up to 6' 1"	up to 185 cm
Tall*	up to 6' 4"	up to 193 cm
Extra Tall*	6' 4" and up	193 cm and up

39

COVERALL

REDWING 61151

MEN'S PREMIUM COVERALL

FEATURES :


- Two side pockets with hidden exterior-to-interior access and press stud closure
- Two back pockets, right side with flap
- Tool pocket on right leg
- Elasticized waistband
- Two chest pockets with zip closure and storm flaps
- 2" (50mm) wide reflective FR striping around arms, legs and over the shoulders
- Two radio loops
- Concealed press studs on cuffs and ankle openings
- Concealed one-way, black high-density polyester coil zip with brass snap closure
- Left sleeve pocket with pen pocket divider, small flap with hook-and-loop closure
- Shoulder pleats for freedom of movement and comfort



FLAME RESISTANT



ANTI-STATIC

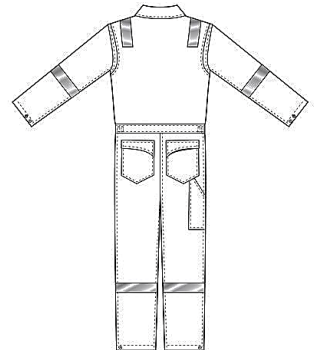

Material

Daletec®, (Quality 15, 502251), FR 98% Cotton, 2% Antistat, 6.5 oz/yd²/220 g/m²

Sizes

32-70, Short/Reg/Tall/XTall

Compliance

EN ISO 11612, EN 1149-5, IEC 61482-2 (Class 1)

Technologies

Flame Resistant Garment, Anti-Static Garment, Electric Arc Flash Protection

Colors

Tan(51)*, Petro Blue(52)*, Navy Blue(53), Royal Blue(54), Red(55), Graphite Gray(56)*, Orange(57), Yellow(59)*, Light Gray(76)*

MEN'S COVERALLS

INSULATED

CHEST	INCH/CM EQUIVALENT	
XS	34"-36"	86-92 cm
S	36"-38"	92-97 cm
M	38"-42"	97-107 cm
L	42"-46"	107-117 cm
XL	46"-50"	117-127 cm
2XL	50"-54"	127-137 cm
3XL	54"-58"	137-147 cm
4XL	58"-62"	147-157 cm
5XL	62"-66"	157-168 cm
6XL	66"-70"	168-178 cm

HEIGHT

INCH/CM EQUIVALENT

Short	up to 5' 9"	up to 175 cm
Regular	up to 6' 1"	up to 185 cm
Tall*	up to 6' 4"	up to 193 cm
Extra Tall*	6' 4" and up	193 cm and up

40

COVERALL

REDWING 69037

WOMEN'S SOFT SHELL JACKET



FEATURES :

- Sleeve pocket with zip closure
- Full length zip closure
- Draw cord at bottom of jacket
- Chest pocket with zip closure
- Two side pockets with zip closure
- Elasticized cuffs with thumb holder
- High collar with fleece lining
- One inside pocket with zip closure

🌊 WATER RESISTANT 🌪️ WINDPROOF



SHIRTS AND JACKETS

US WOMEN'S	CHEST INCH/CM EQUIVALENT	
XS	30"-32"	76-82 cm
S	32"-36"	82-92 cm
M	36"-40"	92-102 cm
L	40"-44"	102-112 cm
XL	44"-48"	112-122 cm
2XL	48"-52"	122-132 cm
HEIGHT	INCH/CM EQUIVALENT	
Regular	up to 5' 7"	up to 170 cm
Tall	5' 8" and up	171 cm and up

Material

93% Polyester/7% Spandex

Technologies

Windproof Garment, Water Resistant Garment

Colors

Forest Green(65), Petro Blue/Navy(68), Multi Pink/Gray(72), Purple/Lavender(98)



The Small Offshore Bag is 21"
L (54cm) x 14" W (36cm) X
12" D (31cm)

Material

Ballistic Nylon

Features

- Ideal for egress to helicopter bays
- Side-by-side full-open top zip for easy access
- Multiple side zip compartments for stowing boots, dirty clothes and other gear
- Dimensions: 21"L (54 cm) x 14"W (36 cm) x 12"D (31 cm)
- Optional padded backpack straps are adjustable/removable
- Padded handles
- Rugged, durable zippers
- ID card pocket
- Heavy-duty bag made of ballistic nylon for durability



The Backpack measures 48cm x 35cm x 20cm.

Material

Ballistic Nylon

Features

- Side-by-side full-open top zip for easy access
- Padded handles
- Rugged, durable zippers
- Heavy-duty bag made of ballistic nylon for durability
- Padded laptop compartment (fits up to 15" laptop)
- Multiple side pockets for stowing beverage bottles & other small items
- Adjustable, padded shoulder straps
- Built in USB port. Charge on the go using a portable battery.
- Utility pocket. Great for quick access to keys or other items you want to keep handy.
- Lays flat for easy inspection at TSA checkpoints
- Tablet sleeve
- Hands-free travel design
- Umbrella pocket
- Detachable phone case on shoulder strap
- Dimensions: 48cm x 35cm x 20cm

ACCESSORIES

REDWING 98009

BOOT OIL

LEATHER CARE PRODUCT - CONDITION



Red Wing Shoes 8 oz. Boot Oil lubricates and preserves quality while repelling water, this tried-and-true formula restores dried-out leather to its natural softness and flexibility.

MATERIALS USED - BOOT OIL STYLE 98009

Volume

8 Oz [237 ml]

ACCESSORIES

REDWING 97105

MINK OIL

LEATHER CARE PRODUCT - CONDITION



Mink Oil softens and conditions leathers with a blend of mink oil, lanolin and silicone. Mink Oil increases water resistance and darkens the leather, creating a deeper, richer color.

ACCESSORIES

REDWING 98013

LEATHER PROTECTOR

LEATHER CARE PRODUCT - PROTECT



Leather Protector works on every leather type and provides a breathable layer of protection against water, dirt and stains. It keeps unwanted elements on the surface where they can be easily wiped away. Contains no ozone-depleting chemicals.

MATERIALS USED - LEATHER PROTECTOR STYLE 98013

Volume

4 Oz (118 ML)

46

ACCESSORIES

REDWING 98008

WATERPROOF LEATHER CLEANER

WATERPROOF LEATHER CARE PRODUCT - CLEAN



The Waterproof Leather Cleaner is specially formulated to effectively remove dirt and stains from your footwear to help keep them looking new. Derived from natural products, it is non-toxic and biodegradable. Safe to use on all waterproof leathers.

MATERIALS USED - WATERPROOF LEATHER CLEANER STYLE 98008

Volume

6 Oz (177 ml)

47

ACCESSORIES

REDWING 98012

NATURSEAL® PASTE

LEATHER CARE PRODUCT - CONDITION



NaturSeal® Paste replaces the tanning oils that tough wear and weather remove. Lightly apply to provide added lubrication to help soften and restore leather condition.

MATERIALS USED - NATURSEAL® PASTE STYLE 98012

Volume

4 Oz (118 ML)